
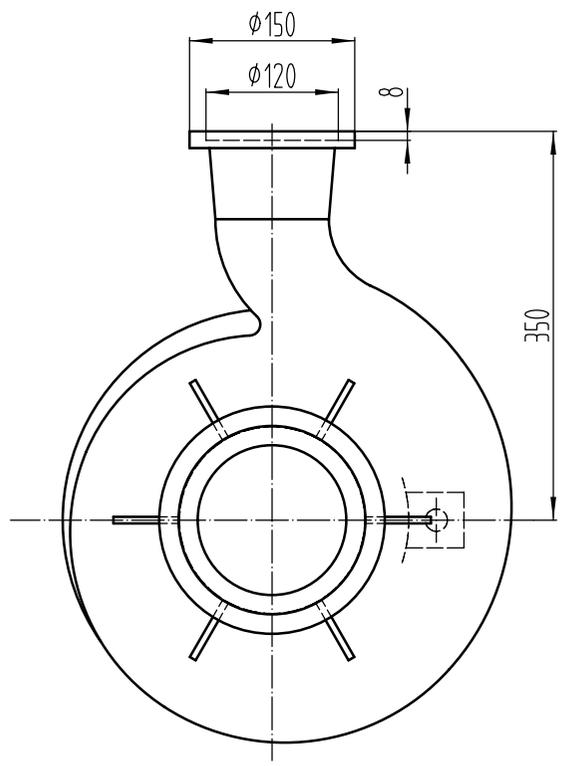


屏蔽电泵选型表

序号	位号	运行数据							型号	数量	电机功率 (kW)	额定电流 (A)	起动电流 (A)	NPSHr (m)	防爆等级	单价(元)
		液体	温度 (°C)	粘度 (cP)	密度 (kg/L)	流量 (m³/h)	扬程 (m)	NPSHa (m)								
1		溴化锂溶液			1.7	90	14		NP150-100F/522H4-F		15	36.5	126	0.55	—	23960
2																
3																
4																
5																
6																
7																
8																
9																
10																
11																
12																
13																
14																
15																
备注： 1、电源：380V x 50Hz x 3Φ； 2、He检漏率小于1x10 ⁻⁸ Pa.m ³ /s。																
Rev.									批准	检查	制表	文件编号			日期	
									汪细权	陈智达	郑坤祥	SW-211421			2021.07.19	

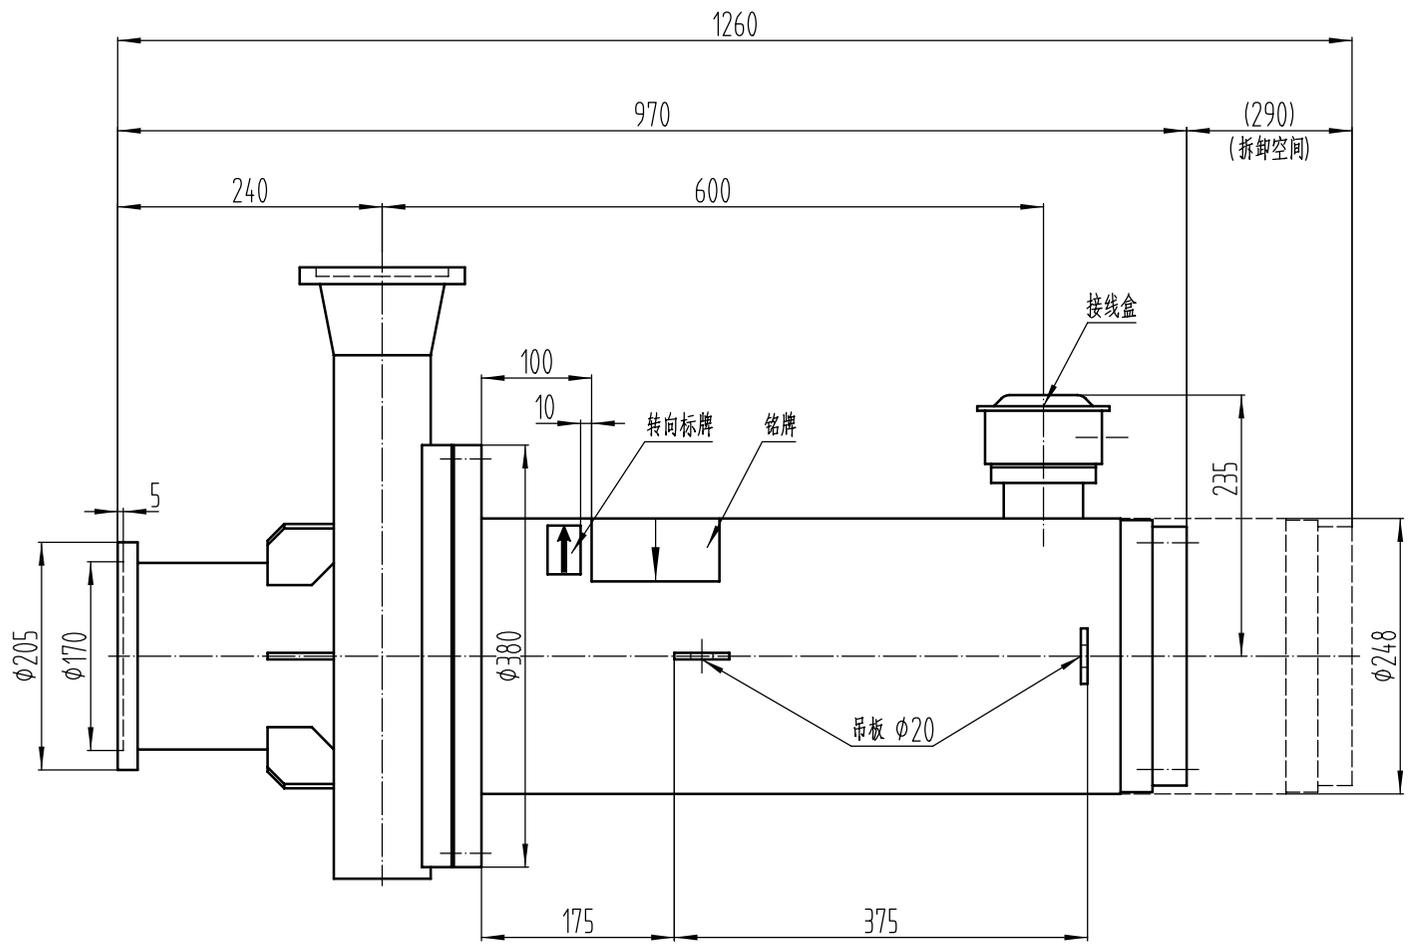

					外形图		合肥新沪	
							NP150-100F/522	
标记	处数	更改文件号	签名	日期			HE-9024	
设计			标准化			阶段标记	重量	比例
绘图						S		
审核			批准			共 1 页 第 1 页		
工艺			日期					